



## ET Series - Mini Helical Gear Unit



### Gear Unit Specifications

Distance from the shaft shoulder to the force application point in [mm]  
The values of a, b, Fr2 are given in the following tables.

	ET01	ET02	ET03	ET04
a	103	116.5	130	147
b	83	91.5	100	112

Fr2, Fa / Output shafts radical loads & axial loads Fr2, Fa

n2 [min <sup>-1</sup> ]	10	40	60	80	100	120	150	180	250	400	
Fr2 [N]	Et01	2500	2500	2180	1980	1840	1630	1400	1320	1080	920
	ET02	5000	5000	4370	3970	3680	3470	2710	2550	2150	1840
	ET03	6500	6500	5550	5040	4510	3800	35030	3320	2800	2390
	ET04	8000	8000	6590	5990	5230	4570	4240	3900	3350	2860

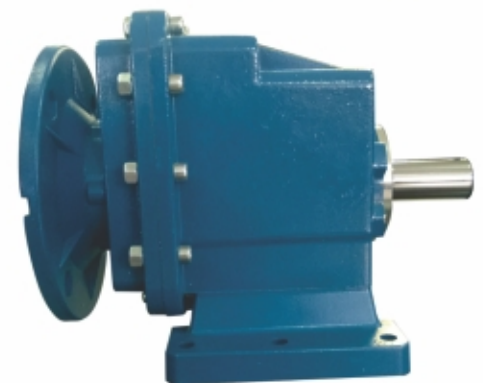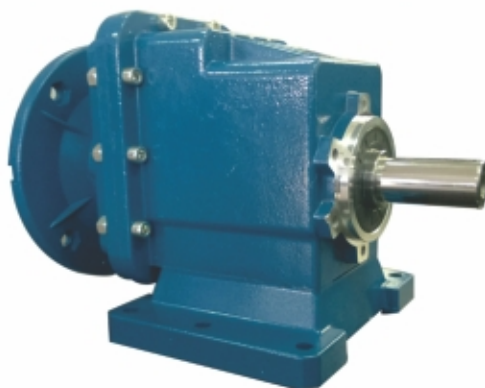

PRASHANT GEARS : B - 305, Solitaire, Nr. Divya Bhaskar Press, S.G.Highway, Ahmedabad - 380051. Gujarat, India.

M: +91 96876 10381/+91 99099 10387/+91 94260 11198 T: +91 79 2970 1965  
E: sales@prashantgears.co.in W: www.prashantgears.co.in